

PCT/IB 03 / 0 5 6 8 1

0 3, 12. 03

REC'D 18 DEC 2003

WIPO

PCT

PA 951949

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 27, 2003

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/434,609

FILING DATE: December 18, 2002

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



L. Edelen

L. EDELEN
Certifying Officer

12/18/02
1130 U.S. PRO
60/434609

Please type a plus sign (+) inside this box → ☐

12/26/02 50434609 12/18/02

PTO/SB/18 (02-01)

Approved for use through 10/31/2002. OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EL661833035US

Date of Deposit: 12/18/2002

INVENTOR(S)				
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)		
Scott E.	Hall	Issaquah, Washington		
<input type="checkbox"/> Additional Inventors are being named on the _____ separately numbered sheets attached hereto				
TITLE OF THE INVENTION (280 characters max)				
SYSTEM FOR REMOVABLY JOINING AN APPLIANCE WHICH INCLUDES A DRIVING MEMBER TO A DRIVEN MEMBER WITH A WORKPIECE				
CORRESPONDENCE ADDRESS				
Direct all correspondence to:				
<input checked="" type="checkbox"/> Customer Number		24737		Place Customer Number Bar Code Label here
OR		Type Customer Number here		
<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City		State		ZIP
Country		Telephone		Fax
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification Number of Pages		13	<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets		3	<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)				
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees				
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 14-1270				
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				
FILING FEE AMOUNT \$160				
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
<input checked="" type="checkbox"/> No.				
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted,

SIGNATURE

Clark A. Puntigam

Date

DECEMBER 18, 2002

REGISTRATION NO.

25,763

(if appropriate)

Docket Number:

US020550

TYPED or PRINTED NAME

Clark A. Puntigam

TELEPHONE 914 333-9640 and 206-448-3200

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

DescriptionSYSTEM FOR REMOVABLY JOINING AN APPLIANCE WHICH INCLUDES A
DRIVING MEMBER TO A DRIVEN MEMBER WITH A WORKPIECE

5

This invention relates generally to small appliance devices, including personal care appliances, and more specifically concerns a structure for joining a driven member assembly portion of such an appliance, which includes a workpiece, and the remainder of the appliance, such as an appliance base/body portion, which contains a driving member for the appliance.

Background of the Invention

15

Personal care appliances, for example, a power toothbrush or shaver, or other small power appliances such as a blender or mixer, will typically have a base portion, which includes a driving member for the appliance, such as a motor, and a driven member assembly, which includes a workpiece element of some kind. A power toothbrush will include a handle portion with a driving member and a removable head portion with a driven member assembly which includes a brushhead with bristles thereon. An attachment or coupling structure is necessary to interface these two portions of the appliance.

25

The arrangement/configuration of the coupling structure depends upon the particular motion transmitted to the driven member by the driving member. In those systems in which the workpiece is driven by torsion action, i.e. a unidirectional or a back-and-forth twisting action, the driven member assembly may, in one embodiment for example, include a spring or other return element which connects a drive shaft on which the workpiece is mounted to an appliance head portion, or in another embodiment include a spring member which clamps the workpiece with the head portion onto the drive shaft.

35

In such systems, the spring force of the clamping member relative to the drive shaft should be high enough that the clamping member will not temporarily separate from the drive shaft during a portion of the drive shaft movement, which

results undesirably in loss of efficiency (lost motion) and substantial noise. The clamping force to achieve such a result, however, has the undesirable result of making removal and insertion of the workpiece relative to the drive shaft, such as in changing brushheads, very difficult, i.e. the force required is too high for convenient removal by most users.

It would thus be desirable to have a coupling structure which does not produce lost motion between the driving member, usually a drive shaft of some kind, and the driven member, and which is substantially noiseless, while at the same time the driven member assembly can be readily removed from the base portion of the appliance carrying the driving member.

Summary of the Invention

Accordingly, the present invention is a system for joining an appliance body having a driving assembly therein to a driven member assembly which includes a workpiece element having a torsional axis of movement, comprising: a plurality of joining assemblies for removably attaching said driven member assembly to said appliance body, wherein the joining assemblies are each separate from the torsional axis of the workpiece element, wherein the joining assemblies each include a mating member on one of a) the appliance body or b) the driven member assembly and an associated receiving element on the other thereof, wherein the mating members and the receiving elements have such a configuration, respectively, and mate in such a manner that there is substantially no lost motion for the workpiece element during operation of the appliance and such that the driven member assembly is readily removable from the appliance body.

Brief Description of the Drawing

Figure 1 is an exploded perspective view showing the coupling system of the present invention in a power toothbrush application.

Figure 2 is an end view of the driven member assembly portion of the appliance of Figure 1 showing the arrangement

between the drive shaft on which the workpiece is mounted and the removable head portion.

Figure 3 is a perspective view of the driven motor assembly.

5 Figure 4 is a perspective view showing the system of the present invention in a shaver application.

Figure 5 is an exploded view of a portion of an appliance showing another embodiment of the present invention.

10 Figure 6 is a cross-section view along lines 6-6 of Figure 5.

Figure 7 is an elevational view showing the spring clamping action of the embodiment of Figures 5 and 6.

Description of the Invention

15 Figure 1 shows the appliance coupling system of the present invention, in a power toothbrush application for illustration. It should be understood that the present invention could be used with other personal care appliances such as a shaver, or in other small appliances, such as power tools
20 and/or kitchen appliances, including blenders or mixers.

 The power toothbrush 10 of Figure 1 includes an elongated base/handle portion 12, which includes an electromagnetic driving member 13 therein, along with a battery 14, although other driving arrangements can be used, including
25 motors. In the particular embodiment shown, electromagnetic driver 13 drives the rear end of a drive shaft 16, which is part of a driven member assembly 15, and on which is mounted a pair of permanent magnets 17-17 in a side-to-side, back-and-forth motion. This driving action is described in detail in U.S.
30 Patent No. 5,189,751, the contents of which are hereby incorporated by reference.

 Drive shaft 16 extends upwardly through the driven member assembly which includes what is referred to as a head portion 24. A workpiece 26 is mounted on the extending end of
35 drive shaft 16. In the embodiment shown, workpiece 26 includes a mounting arm 28 and a brushhead 30. A base part 19 of drive shaft 16 is connected by two flat spring members 32 and 34 to head portion 24. This arrangement results in the conversion of

the side-to-side motion of the rear end of drive shaft 16 provided by electromagnetic driver 13 to an arcuate motion over a defined angle, e.g. 8-14°. Such a structure is described in detail in pending U.S. patent application Serial No. 10/137,962, owned by the assignee of the present invention, the contents of which are incorporated by reference. The arcuate action of drive shaft 16 results in a torque on the head portion 24 through the two spring members 32 and 34.

The coupling system of the present invention is designed to prevent lost motion of drive shaft 16 as it rotates back and forth through the specified arc. The coupling system includes three spaced joining assemblies 37-39 (shown by arrows) between the base portion 12 and head portion 24. The three joining assemblies 37-39 in the embodiment shown are all located around the periphery of the interface between the head portion and the base portion and are separate from the axis of the drive shaft 16. Two joining assemblies 37, 38 are separated by approximately 7/8 inch, while the third joining assembly 39 forms a triangular relationship with assemblies 37, 38, separated by approximately 1-1/8 inches from each of those two joining assemblies, respectively. This arrangement, however, can be varied.

Each joining assembly comprises an elongated pin member 43, which is positioned at and extends from the upper surface of the base portion of the appliance. In the embodiment shown, pin member 43 is approximately 5/16 inch long and is approximately 3/16 inch thick, at its thickest point. In the embodiment shown, pin member 43 has a cross-like cross-section, although this again can be varied. Pin member 43 fits into a mating receptacle 46 positioned in the lower part of the head portion 24 of the appliance. Receptacle 46 can be a separate part, installed in an opening in the head portion, or can be formed directly in the head portion. The pin 43 fits firmly into the receptacle 46, which has a cross-sectional configuration which mates with the cross-sectional configuration of pin 43.

The receptacle and the pin are configured so that there is an interference fit between the receptacle and the pin

such that receptacle 46 is deformed during insertion of pin 43 to the extent that a predicted compression force is placed on pin 43. This force is across two opposing portions (blades) of pin 43 when the pin is in the shape of a cross. The compression force is across an individual (single) blade if element 43 is a single blade, and is directed toward the center of the element 43 if the element is circular.

With all the above configurations, the result is a balanced set of compression forces on the joining assemblies that maintain the driven member assembly in place. When a load is applied by operation of the driving assembly, the balance of the forces shifts as the joining assemblies react to the load. None of the compression forces go to zero because the increase of the reaction forces due to the load action. Accordingly, the mating surfaces remain clamped together. Otherwise, the two surfaces would separate for a brief time and the alternating torque would result in a rapid opening and closing of the two surfaces, producing an unpleasant noise during operation of the appliance.

It is thus important that the two members be designed for a relatively tight fit, so that the action between the two members will be as explained above and that the torsional force on the head portion produced by action of the drive shaft and the two spring members connected to the head portion will not result in any motion between the head portion and the base portion of the appliance and hence there will be no lost motion of the drive shaft.

As explained above, the joining assemblies are not coincident with the torsional axis of the appliance, i.e., the axis of drive shaft 16. In the present arrangement, the physical distance between the three static joining assemblies and the torsional axis of the workpiece results is a significant mechanical advantage for the joining assemblies. The forces required to resist the torque produced by the driving action are such with the arrangement shown that a no lost motion result is achieved without the need for such an extremely tight fit that a large force is necessary to install or remove the head portion. The head portion is conveniently removable by a typical user,

yet there is no lost motion during action of the appliance because of the particular pin/receptacle joining structure described above. The noise produced by the arcuate action of the appliance is also minimal.

5 The distance between the respective joining assemblies 37-39 results in a broad support base, which improves the stability of the coupling structure. Since the coupling structure is in effect static, another part, which may be an adapter or other accessory, such as a fitting to join a larger
10 or smaller head portion to an existing handle can be used between the appliance base portion and the driven member assembly. The accessory moves with the drive shaft 16. The type and movement of the accessory is limited by the power available from the driving member.

15 In use, drive shaft 16 is moved through its action by the driving assembly, either by direct action, such as a motor, or other means, such as magnetic action, without resulting in relative movement between the head portion, to which the drive shaft is secured by means of the spring elements, and the base
20 portion of the appliance. Since there is no lost motion, the device is quiet in operation.

 While the embodiment shown includes three spaced joining assemblies, two spaced joining assemblies, either opposed or spaced in some other arrangement, can be successfully
25 used. More than three joining assemblies can also be used. However, three such assemblies is preferred, for reliable action with economy of structure.

 In general, the coupling structure of the present invention comprises a plurality of joining assemblies which
30 attach a head portion of an appliance to a base portion of the appliance, the base portion including a driving assembly. The joining assemblies are spaced apart from the torsional axis of the device, specifically the drive shaft on which is mounted the workpiece. There is no lost motion with such an arrangement and
35 yet decoupling of the two portions is relatively easy and does not require high force/effort. Figure 1 shows one example of such a system. Figures 5-7 show another embodiment, which is described below.

The coupling structure also includes a registration arrangement to ensure that the two portions are coupled together in proper orientation. A non-symmetric arrangement of the joining assemblies would also accomplish an orientation
5 function. The registration structure shown includes two opposed ear members 51, 53, both relatively thin, which extend upwardly from the periphery of the base portion. The ear members fit into mating spaces 55, 57 between adjacent receiving elements. The ears and spaces are configured such that the two portions
10 can fit together in only one arrangement and result in a more "automatic" or easy coupling of the two appliance portions.

Figure 3 shows the coupling structure of the present invention in a power shaver application, illustrating its usefulness in other appliances besides a power toothbrush. The
15 shaver includes a body portion 50, which contains a driving assembly, such as a motor, therein. The motor drives three drive shafts 54-54, which fit into blade assemblies 56-56, positioned in a shaver head portion 58. Extending from an upper surface of appliance body 50 are three spaced friction pins
20 60-60 mounted around the periphery of the appliance body. Friction pins 60-60 extend into and mate with corresponding receiving openings 62-62 in the shaver head portion. Friction pins 60 engage the receiving openings 62, and the three drive shafts engage the individual blade assemblies 56. The
25 combination of the three pins and their associated receiving openings prevent lost motion of the drive shaft and therefore minimize noise of the apparatus during operation

Figures 5, 6 and 7 show another embodiment of the present invention. The elements shown on those figures are for
30 a power toothbrush, but other appliances can be used. In this embodiment, a cup-like portion 78 at the upper end of a handle portion 79 of a power appliance includes two separate rib portions 81 and 82 which extend radially outward from circular wall 83 of the cup portion 78. Figure 6 shows cup wall 83
35 having a part 85 between ribs 81 and 82 removed (so there is an open space between the ribs), but alternatively, the cup wall 83 could be continuous, with ribs 81 and 82 extending radially outward from an outer surface 83a of wall 83.

A head portion 87 of the appliance fits down over the cup portion 78, mating with the handle portion 79. Drive spring assembly 89 is positioned within the cup portion of the handle as the head and handle mate together, with the drive spring 89 being driven by electromagnetic action from a drive unit within handle 79.

Extending downwardly from lower edge 91 of head portion are two spring receptacles 92, shown most clearly in Figure 7. The spring receptacles 92 (one for each rib) are generally hoop-like in configuration with an open section at an end thereof and small protuberances 94-94 extending from the respective ends of the receptacle. The free ends of the hoop tend to spring toward each other. The receptacles 92 are positioned on head 87 to extend over ribs 81, 82 and to provide a spring force against the ribs. In the embodiment shown, there are two ribs and two mating spring receptacles. However, it should be understood that additional ribs/receptacle combinations can be used.

In operation, the spring force exerted by the receptacles on the ribs in the "A" direction in Figure 6 increase during clockwise torque produced by movement of the workpiece drive spring assembly; hence, the spring force on the ribs in the "B" direction will decrease, which tends to prevent separation of the spring receptacles from the ribs during operation of the device, resulting in quiet operation of the appliance. The spring/rib arrangement provides the desired high resistance against such separation (no lost motion), while at the same time permitting convenient insertion/removal of the head from the handle, as with the embodiment of Figures 1-3.

Although a preferred embodiment of the invention has been described for purposes of illustration, it should be understood that various changes, modification and substitutions might be incorporated in the embodiment without departing from the spirit of the invention, which is defined in the claims, which follow.

What is claimed is:

Claims

1. A system for joining an appliance body (12) having a driving assembly (13) therein to a driven member assembly (15) which includes a workpiece element (26) having a torsional axis of movement, comprising:

a plurality of joining assemblies for removably attaching said driven member assembly to said appliance body, wherein the joining assemblies are each separate from the torsional axis of the workpiece element, wherein the joining assemblies each include a mating member (43) on one of a) the appliance body or b) the driven member assembly and an associated receiving element (46) on the other thereof, wherein the mating members and the receiving elements have such a configuration, respectively, and mate in such a manner that there is substantially no lost motion for the workpiece element during operation of the appliance and such that the driven member assembly is readily removable from the appliance body.

2. A system of claim 1, wherein the configuration of the mating members and receiving elements is such that compression forces sufficient to maintain contact therebetween are always present during torque action of a drive shaft on which the workpiece is mounted.

3. A system of claim 1, including three spaced joining assemblies (37, 38, 39) located around the periphery of the interface between the appliance body and the driven member assembly.

4. A system of claim 1, wherein the mating member of each joining assembly has a non-circular cross-section and the associated receiving element has a similar non-circular cross-section, such that the receiving element and the mating member are capable of mating together.

5. A system of claim 1, wherein the appliance body and the driven member assembly, respectively, include a handle portion and a head portion of an oral care appliance.

10

6. A system of claim 5, wherein the oral care appliance is a power toothbrush.

7. A system of claim 1, including registration elements (51, 53) on the appliance body which mate with the driven member assembly, the registration elements producing a proper orientation between the appliance body and the driven member assembly as the appliance body is joined to the driven member assembly.

8. A system of claim 1, wherein the mating member extends from the appliance body and the receiving element is in the driven member assembly.

9. A system of claim 1, wherein the mating members comprise spaced blade elements in the appliance body and the receiving elements comprise spring assemblies which clamp onto the blade elements with a compression force.

10. An oral care appliance, comprising:

an appliance body (12) having a driving assembly (13) therein;

a driven member assembly (15) which includes a workpiece element (26) having a torsional axis of movement and wherein the workpiece element includes a brushhead (30); and

a coupling structure for joining the appliance body to the driven member assembly, the coupling structure including a plurality of joining assemblies for removably attaching the driven member assembly to the appliance body, wherein the joining assemblies are each separate from the torsional axis of the workpiece element, wherein each joining assembly includes a mating member (43) from one of a) the appliance body or b) the driven member assembly and an associated receiving element (46) in the other thereof, for receiving said mating member, wherein the mating members and the receiving elements have such a configuration, respectively, and mate in such a manner that there is substantially no lost motion for the workpiece element during operation of the appliance, and such that the driven member assembly is readily removable from the appliance body.

11. An appliance of claim 10, including three spaced joining assemblies (37, 38, 39) arranged around the periphery of the interface between the appliance body and the driven member assembly.

12. An appliance of claim 10, wherein the mating member of each joining assembly has a non-circular cross-section and the associated receiving element has a similar non-circular cross-section, such that the receiving element and the mating member are capable of mating together.

13. An appliance of claim 10, wherein the mating member extends from the appliance body and the receiving element is in the driven member assembly.

14. An appliance of claim 10, wherein the mating members include spaced blade elements in the appliance body and the receiving elements comprise spring assemblies which clamp onto the blade elements with a compressive force.

15. A brushhead assembly portion of a power toothbrush which is joinable to and removable from a handle portion of the toothbrush by a plurality of joining assemblies, the joining assemblies being separate from a torsional axis of movement of a brushhead workpiece portion of the brushhead assembly, comprising:

a brushhead assembly which includes a brushhead workpiece element, wherein the brushhead assembly includes a plurality of joining members which mate with associated second joining members in the handle portion to form joining assemblies, wherein the first joining members have such a configuration, relative to the configuration of the associated second joining members and mate therewith in such a manner that there is substantially no lost motion of the workpiece element during operation of the toothbrush and such that the brushhead assembly is readily removable from the handle portion of the toothbrush.

16. A brushhead assembly portion of claim 15, wherein the configuration of the first joining member and the second joining

12

members are such that compression forces sufficient to maintain contact therebetween are always present during torque action of a drive shaft on which the workpiece portion is mounted.

AbstractSYSTEM FOR REMOVABLY JOINING AN APPLIANCE WHICH INCLUDES A
DRIVING MEMBER TO A DRIVEN MEMBER WITH A WORKPIECE

The system includes a plurality of joining assemblies (37, 38, 39) for removably attaching a driven member assembly (15) of the appliance to an appliance body portion (12), wherein the joining assemblies are separate from the torsional axis of the workpiece. The joining assemblies each include an extending pin member (43) on the appliance body and a receiving element (46) in the driven member assembly for receiving the extending pin member. A drive shaft (16) for the workpiece is connected to a head portion (24) of the driven member assembly by two springs (32, 34), wherein the extending pin member mates with the receiving element in such a manner that there is no lost motion of the workpiece during operation but also such that the driven member assembly is readily removable from the appliance body.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input type="checkbox"/> Declaration Submitted With Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	US020550
	First Named Inventor	Hall, Scott E.
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SYSTEM FOR REMOVABLY JOINING AN APPLIANCE WHICH INCLUDES A DRIVING MEMBER TO A DRIVEN MEMBER WITH A WORKPIECE

the specification of which (Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY) Country	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

60434609 . 121802

PTO/SB/01 (03-01)




Approved for use through 10/31/2002. OMB 0651-0032


U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to:		<input checked="" type="checkbox"/> Customer Number or Bar Code Label	24737	OR	<input checked="" type="checkbox"/> Correspondance address below
Philips Electronics North America Corporation					
Name					
580 White Plains Rd.					
Address					
Tarrytown		NY		10591-5180	
City		State		ZIP	
U.S.A.		(914)332-0222		(914) 332-0615	
Country		Telephone		Fax	
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.					
NAME OF SOLE OR FIRST INVENTOR:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Scott E.		Family Name or Surname	
Inventor's Signature		Date			
Issaquah		WA		USA	
Residence: City		State		Country	
23505 Southeast 137th St.				US	
Mailing Address				Citizenship	
Issaquah		WA		98027	
City		State		Zip	
				USA	
				Country	
NAME OF SECOND INVENTOR:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Inventor's Signature		Date			
Residence: City		State		Country	
				Citizenship	
Mailing Address					
City		State		Zip	
				Country	
<input type="checkbox"/> Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.					

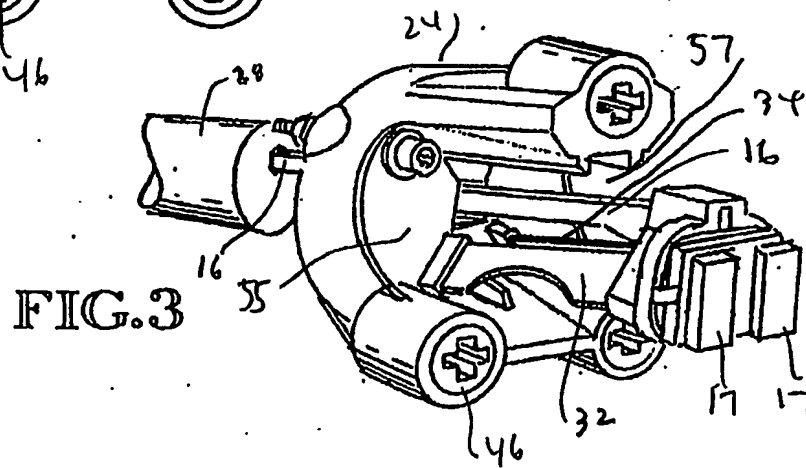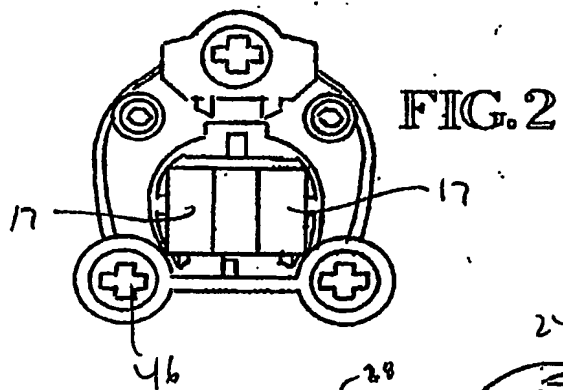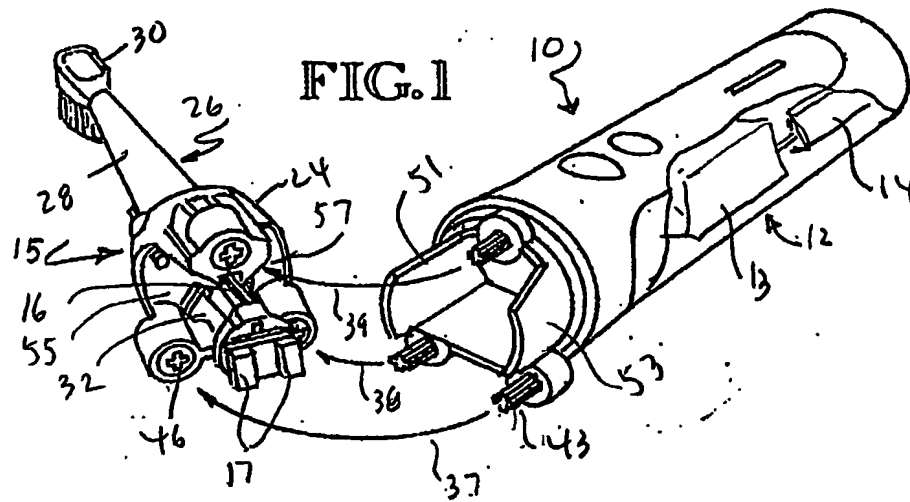

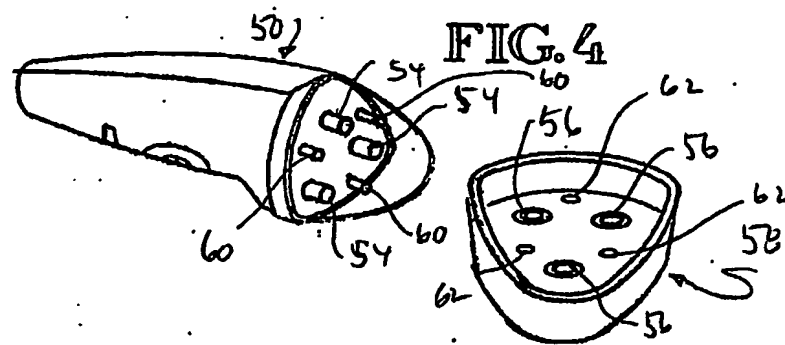

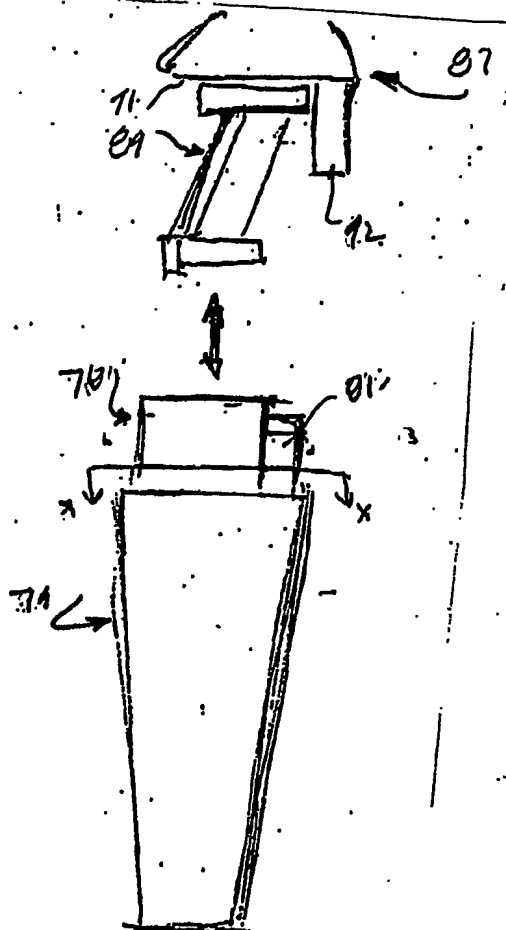


FIG 5A



FIG 5C

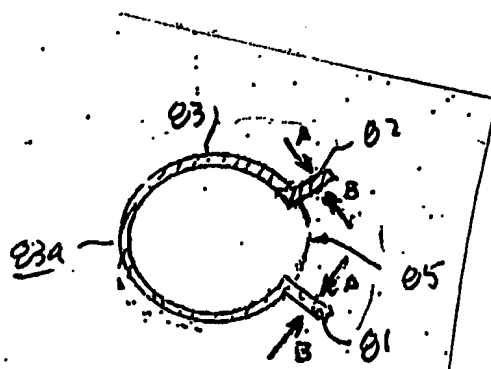


FIG 5B